



# AirSyntex

## Air Filters

M5 - ePM 10 55%



Fire retardant to DIN53438-3 (F1)



Certificate No: 15.06.011. Volz GmbH.

Our M5 **AirSyntex** Air Filters achieve ePM 10 55% delivering consistent energy efficient performance.

Tested according to ISO 16890 - EN 779:2012, **AirSyntex** are Eurovent approved and used widely across a number of environments including retail, commercial, healthcare, education, engineering, hotels, leisure and pharmaceutical.

**AirSyntex Air Filters are the leading choice for a fully compliant, clean air solution.**



### THE KEY BENEFITS

#### 1 — Excellent service life

The tight woven, ultra-fine fibre structure with two stage filtration ensures high dust holding capacity for longer service life with a low initial and average pressure drop, saving time, energy and reducing costs.

#### 2 — Tested according to ISO 16890, EN 779:2012 and Eurovent approved

With third party Eurovent approval, ISO 16890 - EN 779:2012 certification you can be confident that **AirSyntex** will perform consistently at the specified energy and performance standards. In addition to this they are tested to fire prevention requirements DIN 53438-3 (F1).

#### 3 — Environmentally friendly

**AirSyntex** are Oeko-Tex 100 approved, meaning they are free from harmful substances and skin irritant. The plastic frame option offers the additional benefit of being fully incinerable eliminating the need for landfill.



**Air conditioning & ventilation technology**



**Painting & drying technology**



# AirSyntex

M5 - ePM 10 55%

## VERSIONS

- Full range of standard sizes, bespoke sizes available
- Frame types:
  - Metal frame (20 or 25mm)
  - Plastic frame (25mm)
- Filters with plastic frames are fully incinerable
- Option to have a foamed hygiene-gasket

## MATERIAL CHARACTERISTICS

- Tested according to EN 779:2012, ISO 16890 and Eurovent approved
- Fire prevention requirements according to DIN53438-3 (F1)
- Oeko-Tex 100 approved, environmentally friendly so can be incinerated rather than going to landfill (when choosing plastic frames)
- Humidity resistant up to 100% r. h.
- Lacquer compatibility according to IPA-control
- Environmentally safe non-shedding synthetic fibres
- Temperature resistant up to a maximum of 70°C depending on type of frame


## APPLICATIONS

For fine filtration in heat ventilation and air conditioning devices and plants of all kinds.

- Offices, hospitals, computing centres
- Pharmaceutical, fine-mechanical and food industry
- Prefiltration e.g. for HEPA filters

## CLASSIFICATION

- Filter class M5 - ePM 10 55%

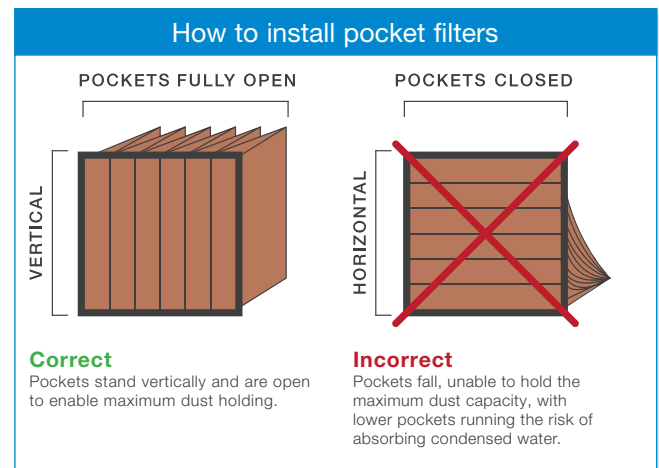


Technical data:	
Medium	Synthetic - Progressive microfibre
Colour medium	Brown
Frame	Plastic frame (25 mm) Metal frame (20 or 25 mm)
Filter dimensions (W x H x D)	592 x 592 x 635 (mm)
Number of pockets	10
Filter area [m <sup>2</sup> ]	7.5
Filter class	M5 - ePM 10 55%
Energy Class	2.347 kWh/Year
Recommended nominal air flow (m <sup>3</sup> /h)	3400
Maximum air flow (m <sup>3</sup> /h)	4250
Initial pressure drop approx. (Pa) @ 3400m <sup>3</sup> /h	65
Recommended final pressure drop (Pa)	300
Average arrestance (%)	≥ 90
Average efficiency (0,4 µm) (%)	≥ 80 < 90
Discharged efficiency of medium (0,4 m) (%)	> 35
Maximum humidity resistance (%)	100
Max. operating temperature (°C) - depending on type of frame	70



# AirSyntex

M5 - ePM 10 55%

**Performance Graph (592 x 592 x 635, 10 Pocket)**

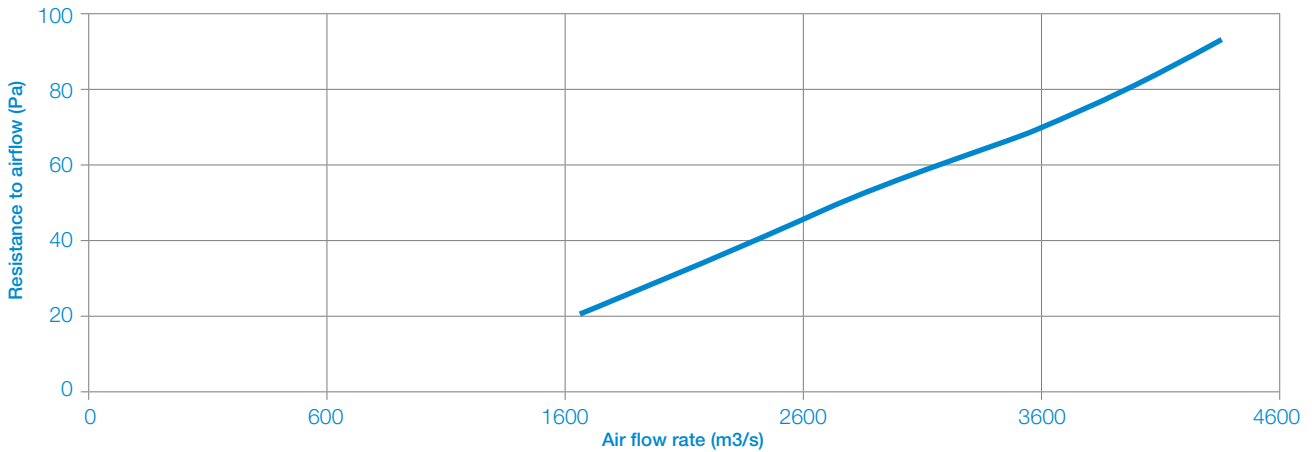

**Standard Frame Sizes & Pocket Lengths\***

Dimensions (mm) (width x height x depth)	Number of pockets	Filter area (m <sup>2</sup> )	Nominal air flow (m <sup>3</sup> /h) Initial pressure drop (Pa)
287 x 287 x 360	3	0.6	500 / 95Pa
287 x 592 x 360	3	1.3	1.000 / 95Pa
287 x 892 x 360	3	1.9	1.500 / 95Pa
490 x 592 x 360	5	2.1	1.600 / 95Pa
490 x 892 x 360	5	3.2	2.500 / 95Pa
592 x 287 x 360	6	1.2	900 / 95Pa
592 x 490 x 360	6	2.1	1.600 / 95Pa
592 x 892 x 360	6	3.9	3.000 / 95Pa
287 x 287 x 500	3	0.9	700 / 95Pa
287 x 592 x 500	3	1.8	1.400 / 95Pa
287 x 892 x 500	3	2.7	2.100 / 95Pa
490 x 592 x 500	5	3.0	2.300 / 95Pa
490 x 892 x 500	5	4.5	3.500 / 95Pa
592 x 287 x 500	6	1.7	1.300 / 95Pa
592 x 490 x 500	6	2.9	2.300 / 95Pa
592 x 892 x 500	6	5.4	4.200 / 95Pa
287 x 287 x 635	5	1.8	800 / 65Pa
287 x 592 x 635	5	3.8	1.700 / 65Pa
287 x 892 x 635	5	5.7	2.600 / 65Pa
490 x 592 x 635	8	6.0	2.700 / 65Pa
490 x 892 x 635	8	9.1	4.100 / 65Pa
592 x 287 x 635	10	3.6	1.600 / 65Pa
592 x 490 x 635	10	6.2	2.800 / 65Pa
592 x 892 x 635	10	11.3	5.100 / 65Pa